



Architectural



SIGNAGE
& PRINT

Static Cling Frosted Vinyl

Static Cling Frosted Vinyl is an easy, glue-free way to add privacy while letting in natural light. It's perfect for bathrooms, offices, or street-facing windows. Simple to apply and remove, it leaves no residue, making it ideal for renters or temporary needs. The frosted finish offers a sleek, modern look, and the film is reusable and cost-effective—offering style, function, and flexibility without permanent changes to your glass.

Technical Performance Data

Calculated on 3mm single-pane glass.

Natural Light & Glare	
VLT (Visible Light Transmission)	40%
Visible Light Reflectance (internal)	n/a
Glare Reduction	54%

Solar Energy	
Transmittance	n/a
Reflectance	n/a
Absorption	n/a
Total Solar Energy Rejected (TSER)	n/a

Thermal Energy	
Shading Coefficient	n/a
Solar Heat Gain Coefficient	n/a
U-Value - (W/m ² K)	5.8
R-Value - (m ² K/W)	0.17

Ultraviolet & Infrared	
UV Rejection	80%
IR Rejection	65%
Anti Fade Rating (0-100)	71

Manufactured Specifications	
Thickness	170 µm
Structure:	Calandered Monomeric 120g
Composition	PVC & PET
Warranty	See lifespan
Colour	Clear
Ink Compatibility	Eco Solvent, UV, Latex
Stock Code	FSTATS

For Reference Only: Technical specifications can differ between batches. Dura Vista retains the right to update this information at any time without notice. **Warranty covers material replacement for minimum years of lifespan.**

Product Care & Maintenance:

This film has no adhesive and can be removed. Due to the electrostatic cling capability, delamination cannot be included in the warranty. Try not to remove regularly in order to prolong the life of the product.

Installation Guidelines

Vertical Installation on standard glass surface

Single Pane Glass	
Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Thermally Toughened Safety Glass (EN 12150)	✓


Double Pane / Double Glazing	
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane (Low-E)	✓
External: SATDIP / PVB / Lam. Safety Glass	✓
Internal: SATDIP / PVB / Lam. Safety Glass	✓
Thermally Toughened Safety Glass (EN 12150)	✓

Safety Guideline Symbols	Symbol
Safe to install	✓
Unsafe to install	X
Caution, will cause thermal stress	!
For Internal use only	✓
Peel Strength (gr/inch)	>1000
REACH & RoHS Respected	✓

Lifespan (minimum to maximum)	Years
Indoor Use (No UV Exposure)	4 - 5 yrs
Indoor Use (Direct UV or Partial UV)	1 - 3 yrs
Outdoor Use (Shaded or Partial UV Exposure)	1 - 3 yrs
Outdoor Use (Full UV)	0 - 1 yrs

Lifespan does not refer to ink fading time.

Guidelines provided are based on a single glass surface up to 2.5m² with no single length or width greater than 2 meters.

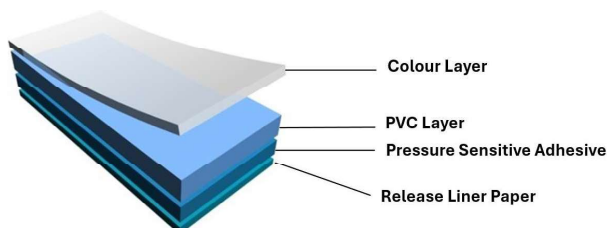

Static Cling Frost - Monomeric Vinyl

Distributed by: **Dura Vista LTD**

Tel: 01387 444 100 | info@duravista.co.uk

www.duravista.co.uk